


V2 XL & CLASSIC · STAINLESS TOILET

2105 STAINLESS TOILET

WALL-HUNG SIPHON JET

A seamless-welded stainless steel water closet with an elongated Bemis seat. It comes standard in both the Portland Loo V2 XL and the V1 Classic.

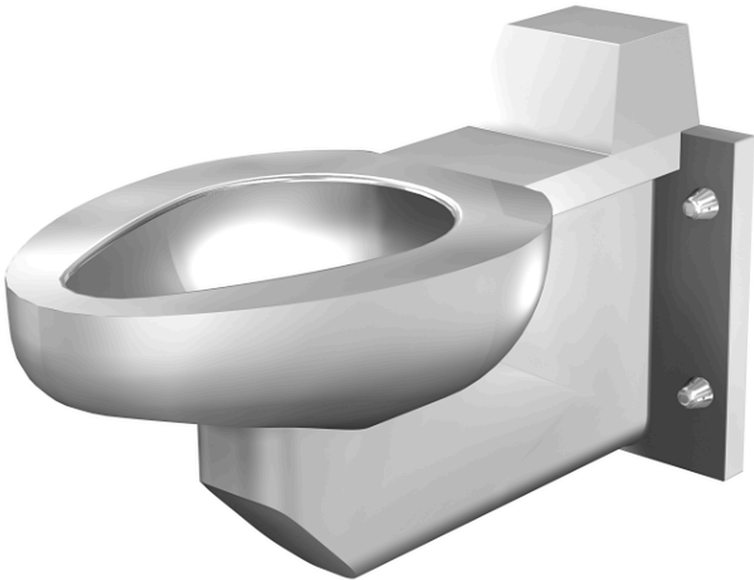

1.28 GPF	16 GA 304	2-1/8"	XL + Classic
WATER PER FLUSH	STAINLESS; 316 ON REQUEST	BALL PASS, ENCLOSED TRAP	STANDARD IN BOTH

OVERVIEW

The 2105 is the toilet in every Portland Loo, both the V2 XL and the V1 Classic. It is a single welded stainless steel shell with no porcelain to crack, and every Portland Loo restroom comes with an elongated Bemis brand toilet seat.

The unit hangs off the floor on a 4-bolt in-wall carrier, so the floor underneath stays open for hosing down. The flush valve is concealed in the wall. This is also the same model Madden Fabrication builds on for its cold weather toilet system.

KEY FEATURES




- 01 Seamless welded stainless**
16 gage type 304, satin finish inside and out; 316 available on request.
- 02 Elongated Bemis seat**
Every Portland Loo restroom comes with an elongated Bemis brand toilet seat.
- 03 Siphon jet, elongated bowl**
1.28 GPF, a self-draining flushing rim and a fully enclosed trap that passes a 2-1/8" ball.
- 04 Off-floor mounting**
Installs from the front on a reinforced wall flange. Leaves the floor clear for cleaning.

CONSTRUCTION & SPECIFICATIONS

Model	2105-W-1 siphon jet toilet, off-floor, wall (concealed) supply
Fits	Portland Loo V2 XL and V1 Classic (standard equipment)
Construction	16 gage type 304 stainless steel, seamless welded; satin finish exterior and bowl interior; reinforced wall flange
Seat	Elongated Bemis brand toilet seat, supplied with every Portland Loo restroom
Bowl	Elongated, siphon jet, self-draining flushing rim
Overall size	29" (737 mm) projection from wall × 14" (356 mm) wide; bowl 11-1/2" (292 mm) wide
Rim height	15" (381 mm) from floor
Water	1.28 GPF; requires at least 25 PSI flow pressure; 1-1/2" NPT flush valve connection
Trap	Fully enclosed, minimum 3-1/2" seal, passes a 2-1/8" ball
Waste	Gasketed wall outlet, centered 5-1/2" (140 mm) above the floor
Mounting	Installs on the finished wall from the front onto a 4-bolt in-wall support carrier (by others)
Compliance	ASME A112.19.3-2008, CSA B45.4-2008

ORDERING OPTIONS

OPTION	STANDARD	AVAILABLE ON REQUEST
Material	Type 304 stainless Std	Type 316 stainless
Supply	-W wall, concealed Std	-T top, exposed
Flush rate	1.28 GPF Std	1.6 or 3.5 GPF (not available in California)
Seat	Elongated Bemis seat Std	—
Extras	16 gage housing Std	14 gage housing; Flood-Trol; cap nuts; bedpan lugs

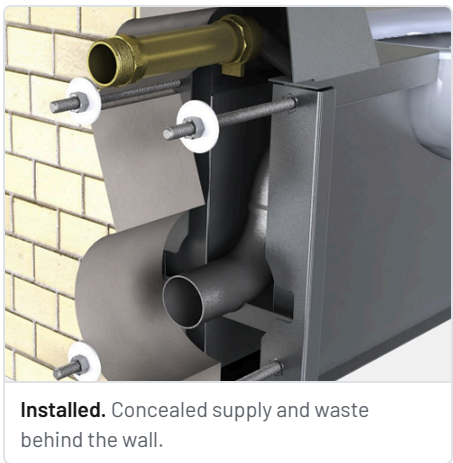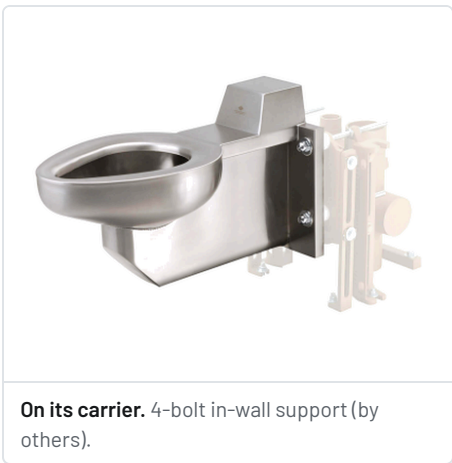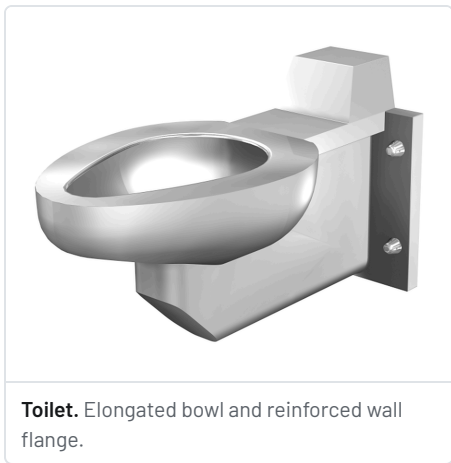

COLD CLIMATES — Madden Fabrication's cold weather toilet system is built on this same 2105 model. For sites that freeze, ask about the cold weather package when you order. Give the wall thickness and wall type with every order.