

TOUCH-UP PAINT

FACTORY COLOR MATCH

Anti-Graffiti Gray Touch-Up Paint

Color-matched to the Loo's factory anti-graffiti gray powder coat. Brush out nicks, feather in scuffs, or roll a whole panel.

**COLOR****Anti-Graffiti Gray**

Matches the factory semi-gloss, smooth powder coat

BRUSH-IN-CAP**2 oz bottle**

Best for nicks and scratches

AEROSOL**240 g can**

Feathers in medium to large areas. Shipping restrictions apply

BRUSH-ON**Quart**

Redo a whole panel with a roller

OVERVIEW

Loo panels in anti-graffiti gray are factory powder coated with an exterior-grade urethane. This touch-up paint is custom mixed by Forrest Technical Coatings to match that finish, so maintenance crews can repair chips from vandalism, cleaning and everyday wear without refinishing the whole Loo.

Choose the format by the size of the repair: the brush-in-cap bottle for small damage, the aerosol for blending larger areas, and the quart for a full panel.

KEY FEATURES

- 1 Factory color match**
Mixed to Madden Fabrication's anti-graffiti gray, the same color as the factory powder coat on the Loo.
- 2 Brush in the cap**
The 2 oz bottle has a brush built into the cap, so you can dab paint right into a nick or scratch.
- 3 Aerosol for feathering**
A custom-filled SEM Multi-Coat aerosol sprays an even coat and feathers the edges into the surrounding finish.
- 4 Quart for full panels**
The brush-on paint also comes by the quart for rolling out a whole panel.

PICK THE RIGHT FORMAT

FORMAT	BEST FOR	APPLY WITH	NOTE
2 oz bottle	Nicks and scratches	Brush in the cap	—
Aerosol, 240 g	Feathering medium to large areas	Spray	Shipping restrictions apply
Quart	Redoing a whole panel	Roller or brush	—

Aerosol cans are regulated for shipping, so delivery options are limited. Contact us for details.

TOUCH-UP PAINT

Color	Anti-Graffiti Gray, a Madden Fabrication custom color mixed by Forrest Technical Coatings, Portland, OR
Formats	2 oz bottle with brush-in-cap · 240 g (8.4 oz) aerosol, custom-filled SEM Multi-Coat 61003 · quart, brush-on
Use	Touching up the powder-coated panels on the Portland Loo
Shipping	Shipping restrictions apply to the aerosol. Contact us about delivery options.

FACTORY FINISH IT MATCHES

Coating	Exterior-grade urethane powder coating, Forrest Technical Coatings 1PL-044PC05-013-911
Appearance	Gray · semi-gloss, 40-50 at 60° (ASTM D523) · smooth
Film & cure	2.0-3.0 mils (51-76 µm) · cured 10 minutes at 400°F (204°C)
Performance	Adhesion 5B (ASTM D3359) · impact 40 in-lb (ASTM D2794) · pencil hardness 2H (ASTM D3363)

Factory values are from the powder coat's technical data sheet (tested on cold-rolled steel). They describe the factory finish, not the touch-up paint.


VIEWS



Aerosol. For feathering medium to large areas.



2 oz bottle. The brush is built into the cap.

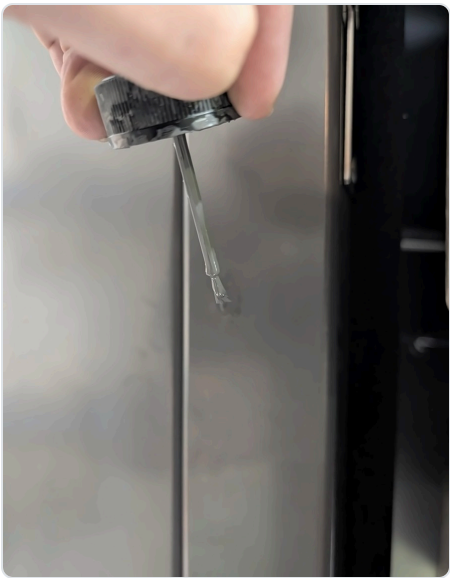

In use. Brushing out a nick on a Loo panel.

TOUCH-UP TIP

Clean and degrease the damaged area and let it dry. Shake or stir the paint well, then test it on a hidden spot first, because colors can vary slightly from the sample. Apply thin coats rather than one heavy one. With the aerosol, keep the can moving and feather the edges past the repair. Let the paint cure fully before washing the panel.