
REPLACEMENT PART FRONT DOOR V1 CLASSIC

BEST 9K DOOR LEVER

The heavy-duty Grade 1 lever lock for the V1 Classic Loo's front door. Users lock it with a pushbutton inside, staff unlock it with a key outside, and the inside lever always lets people out.

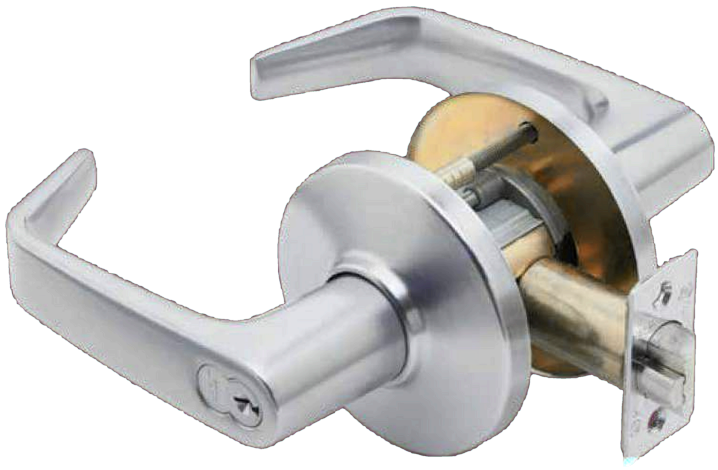

Grade 1	2-3/4"	7-pin	626
ANSI/BHMA A156.2, Series 4000	Backset	Best interchangeable core housing	Satin chromium plated

OVERVIEW

The Best 9K is a heavy-duty cylindrical lever lock built for high-traffic, high-abuse doors. On the V1 Classic it's set up with the dormitory function: the pushbutton on the inside lever locks the outside lever while the restroom is in use, and turning the inside lever releases it. Staff can lock or unlock the outside lever with a key.

The #15 contour angle return lever meets California Title 19 and Title 24, and the lock meets the intent of the ADA (ANSI A117.1). It takes a 7-pin Best interchangeable core, so you can rekey it in seconds to match the rest of your Best keying.

KEY FEATURES

01 Built to resist attack
A rose locking pin, a slotted key release cam and a hardened steel outside sleeve stand up to twisting and prying. Even when damaged, the lock still allows key access.

02 Always lets people out
The inside lever always opens the door, whether the outside lever is locked or not.

03 Best interchangeable core
Pull and swap the core for quick rekeying or master keying, with no need to remove the lock.

04 Accessible lever
The #15 return lever and the strong return springs resist sag, and the lock meets ADA and California Title 24.


SPECIFICATIONS

ITEM	DETAIL
Model	Best 9K37T15DS3626: 9K series · 3 = 2-3/4" backset · 7 = 7-pin core housing · T = dormitory · 15 lever · D rose · S3 strike · 626 finish
Function	Dormitory (T), ANSI F90. The outside lever is locked by the inside pushbutton or the outside key, and unlocked by the key. Turning the inside lever releases the pushbutton. The inside lever is always free.
Grade	ANSI/BHMA A156.2, Series 4000, Grade 1
Lever / rose	#15 contour angle return lever (zinc alloy, plated); D rose, 3-1/2" convex
Latch	Solid brass, 9/16" throw; 2-1/4" x 1-1/8" beveled front
Strike	S3: 4-7/8" x 1-1/4" curved lip, ANSI A115.2 for 1-3/4" doors
Door / prep	Doors 1-3/4" to 2-1/4" thick; 2-1/8" bore (ANSI A115.2), plus two 5/16" through-bolt holes at 12 and 6 o'clock
Projection	About 2-3/4" on a 1-3/4" door
Finish	626 (US26D) satin chromium plated
Listings	UL listed for 3-hr A-label single or double doors; California State Fire Marshal; meets the intent of ADA / ANSI A117.1 §404.2.6

ORDERING OPTIONS

OPTION	STANDARD	AVAILABLE ON REQUEST
Core	Less core STD	Best 7-pin interchangeable core
Fits	V1 Classic front door STD	—


VIEWS

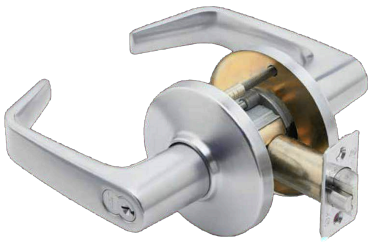

Assembled. #15 lever, D rose and latch, with the keyed outside lever in front.



Exploded. Chassis, latch, roses, levers and core. This catalog view shows a curved #16 lever; the Loo uses the #15.



Door prep. 2-1/8" bore at a 2-3/4" backset, with through-bolt holes above and below.

ORDERING TIP

The lock ships less core as standard. If you want us to supply a Best 7-pin core, tell us your keyway or key system so it matches your other Loo locks. Otherwise, your locksmith can fit a core from your own system.