

CHASE DOOR · SCHLAGE B561B

ONE-WAY DEADBOLT

SFIC PREP, LESS CORE

The keyed-outside deadbolt that secures the Portland Loo's utility chase door, ready for a Best brand small format interchangeable core.



E0162

KEY OUTSIDE, BLANK PLATE
INSIDE

1" throw

DEADBOLT WITH ANTI-PRY
SHIELD

SFIC prep

FITS BEST BRAND CORES,
LESS CORE

ANSI A156.36

GRADE 2 · GRADE 3 WITH SFIC

OVERVIEW

The Schlage B561B is a one-way commercial deadbolt: the bolt is thrown and retracted by key from the outside only, and the inside is a blank plate with exposed screws. On the Portland Loo it locks the utility chase door, keeping the plumbing, electrical and supplies behind it accessible only to your maintenance team.

The cylinder is prepped for a small format interchangeable core (SFIC) and ships without one. It is compatible with Best brand SFIC cores, so you can drop in a core keyed to your existing master key system and re-key the door in seconds by swapping cores.

KEY FEATURES

01 Keyed from outside only

No thumb turn and nothing to operate on the chase side, just a blank plate.

03 Built to resist attack

Anti-pry shield protects the latch and a metal dust box anchors the bolt deep in the frame.

02 Best SFIC compatible

Use Best brand cores to match your master key system. Swap a core to re-key in seconds.

04 Quick installation

Adjustable 2-3/8" or 2-3/4" backset locks into place. Fits 1-3/8" to 1-3/4" doors.


CONSTRUCTION & SPECIFICATIONS

Model	Schlage B561B, cylinder x blank plate
ANSI function	E0162: bolt thrown or retracted by key outside; blank plate with exposed screws inside
Cylinder	Small format interchangeable core (SFIC) prep, less core. Compatible with Best brand SFIC cores
Bolt	1" throw, anti-pry shield, metal dust box
Latch face	1-1/8" x 2-1/4", square corner
Strike	1-1/8" x 2-3/4", square corner
Backset	2-3/8" to 2-3/4", adjustable
Door thickness	1-3/8" to 1-3/4"
Grade	ANSI/BHMA A156.36 Grade 2; Grade 3 when installed with an SFIC cylinder. Medium duty
Accessibility	Meets ADA requirements, ICC A117.1
Fire rating	None

ORDERING OPTIONS

OPTION	STANDARD	AVAILABLE ON REQUEST
Finish	626 Satin Chrome STD	605, 606, 609, 612, 613, 619, 622, 625
Core	Not included (less core)	Best brand SFIC core, keyed to your system
Backset	2-3/8" / 2-3/4" adjustable STD	—


VIEWS

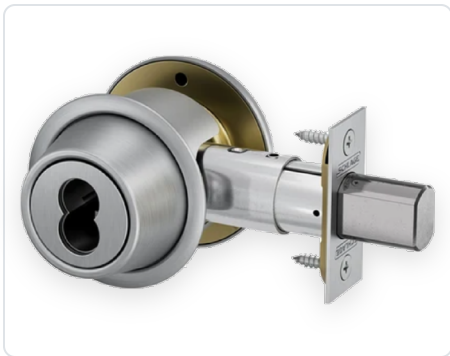

OUTSIDE · SFIC CYLINDER



INSIDE · BLANK PLATE

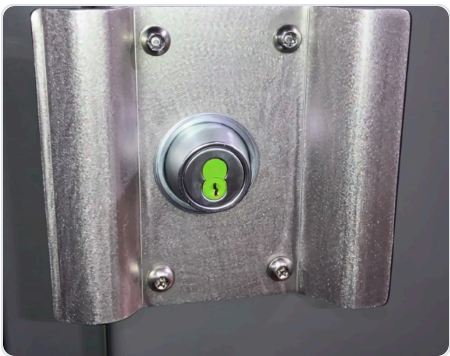

INSTALLED ON A LOO CHASE DOOR

ORDERING TIP The deadbolt ships less core. Order a Best brand SFIC core keyed to your existing system so maintenance staff can use the keys they already carry, and keep a spare core on hand to re-key the chase door quickly if a key goes missing.